

Directional seated valve type EM, EMP

Product documentation



Operating pressure p_{\max} :

450 bar

Flow rate Q_{\max} :

160 l/min



© by HAWE Hydraulik SE.

The reproduction and distribution of this document, as well as the use and communication of its contents to others without explicit authorization, is prohibited.

Offenders will be held liable for the payment of damages.

All rights reserved in the event of patent or utility model applications.

Brand names, product names and trademarks are not specifically indicated. In particular with regard to registered and protected names and trademarks, usage is subject to legal provisions.

HAWE Hydraulik respects these legal provisions in all cases.

HAWE Hydraulik cannot provide individual guarantees that the stated circuits or procedures (including in part) are not subject to the intellectual property rights of third parties.

Printing date / document generated on: 2023-08-16

Table of Contents

1	Overview of directional seated valve type EM, EMP.....	4
2	Available versions.....	5
2.1	Screw-in valve.....	5
2.1.1	Basic type and size.....	5
2.1.2	Function block.....	7
2.1.3	Solenoid voltage and connector.....	8
2.1.4	Seal.....	9
2.2	Single connection blocks.....	10
2.2.1	Single connection blocks without/with drain valve.....	10
2.2.2	Single connection block with additional functions.....	12
2.3	Valve bank BEM.....	14
2.4	Valve bank BEMD 21.....	16
3	Parameters.....	17
3.1	General data.....	17
3.2	Pressure and volumetric flow.....	18
3.3	Weight.....	19
3.4	Characteristic lines.....	20
3.5	Electrical data.....	24
4	Dimensions.....	26
4.1	Valve and actuating solenoid.....	26
4.2	Screw-in valve.....	29
4.3	Single connection block.....	35
4.3.1	Single connection block with additional function.....	40
4.4	Valve bank.....	42
5	Installation, operation and maintenance information.....	43
5.1	Intended use.....	43
5.2	Assembly information.....	43
5.2.1	Notes on commissioning.....	44
5.2.2	Creating the mounting hole.....	44
5.2.3	Setting the stroke limitation.....	44
5.3	Operating instructions.....	44
5.4	Maintenance information.....	45
6	Other information.....	46
6.1	Accessories, spare and individual parts.....	46
6.1.1	Tapped plugs.....	46
6.1.2	Seal kits.....	47
6.1.3	Line connectors.....	47

1**Overview of directional seated valve type EM, EMP**

Directional seated valves are a type of directional valve. Their function is to direct the flow of hydraulic medium in certain directions, therefore connecting the relevant connections, or shutting off the flow with zero leakage. By this means they control the movement of the actuators in a hydraulic system.

The directional seated valves type EM and EMP are screw-in valves. As cone valves they are tightly sealed, with zero leakage in the closed state. 2/2-way directional seated valves with direct or pilot-controlled electromagnetic actuation are available. The directional seated valve type EM is available as a directional valve; type EMP is available as a directional seated valve with either damped switching (soft-shift) or proportional throttling.

Appropriate connection blocks enable direct pipe connection or manifold mounting. They may contain additional components, e.g. a drain valve, bypass throttle valve, pressure switch or flow control valve.

Features and advantages

- Zero leakage in closed switching position
- Directly switching up to approx. 3 l/min and with pilot-controlled switching up to 160 l/min
- Low flow resistance even at high flow rates
- Long service life thanks to hardened seats

Intended applications

- Cranes and lifting equipment
- Road vehicles
- Materials handling (industrial trucks etc.)
- Handling and mounting technology (industrial robots, etc.)

*Screw-in valve**Screw-in valve with single connection block*

2 Available versions

2.1 Screw-in valve

Ordering examples

EM 21 S		-AMP 24		
EM 32 V	-3/4 F	-G 24	-M	-AT
EMP 21 VG 10		-WG 230		
EMP 31 SG	-3/4	-G 24		
EMP 21 S 20		-AMP 24		
EMP 31 V	-1/4	-G 24	-M	

2.1.1 "Basic type and size"

2.2 "Single connection blocks"

2.1.3 "Solenoid voltage and connector"

2.1.2 "Function block"

2.1.4 "Seal"

2.1.1 Basic type and size

Type	Comment	Flow rate Q _N (l/min)	Pressure p _{max} (bar)	Flow direction	Circuit symbol
Directional seated valves, directional valve					
EM 11 D EM 11 D 0.8 EM 11 D 1.2 EM 21 D	direct switching ▪ for pilot purposes	1 2.5 5 3	450 150 60 400	A → B B → A = not permitted	
EM 11 V EM 21 V EM 31 V EM 41 V	pilot-controlled shifting	20 40 80 160	400 400 400 350	A → B B → A = free flow, solenoid must be de-energised	
EM 12 V EM 22 V EM 32 V EM 42 V	pilot-controlled shifting	20 40 80 160	400 400 400 350	Any	
EM 11 DS EM 11 DS 0.8 EM 21 DS	direct switching ▪ for pilot purposes	1 2.5 3	450 150 400	A → B B → A = not permitted	

Type	Comment	Flow rate Q _N (l/min)	Pressure p _{max} (bar)	Flow direction	Circuit symbol		
EM 11 S	pilot-controlled shifting	20	400	A → B			
EM 11 ST	<ul style="list-style-type: none"> with manual override, not displayed additionally 	20	400	B → A = not permitted			
EM 21 S		40	400				
EM 21 ST	<ul style="list-style-type: none"> type ..ST with button for manual actuation (see Chapter 4, "Dimensions") 	40	400				
EM 31 S		80	400				
EM 31 ST		80	400				
EM 41 S		160	350				
EM 41 ST		160	350				
EM 12 S		20	400	Any			
EM 12 ST		20	400				
EM 22 S		40	400				
EM 22 ST		40	400				
EM 32 S		80	400				
EM 32 ST		80	400				
EM 42 S		160	350				
EM 42 ST		160	350				
Directional seated valve, soft-shift							
EMP 21 VG	pilot-controlled shifting	40	400	A → B			
EMP 21 VG 10	<ul style="list-style-type: none"> type ..VG 10(20) with modified throttle characteristics (see Chapter 3.4, "Characteristic lines") 	40	400	B → A = free flow, solenoid must be de-energised			
EMP 21 VG 15		40	400				
EMP 21 VG 20		40	400				
EMP 31 VG		80	400				
EMP 41 VG		160	350				
EMP 21 SG	pilot-controlled shifting	40	400	A → B			
EMP 21 SG 10	<ul style="list-style-type: none"> with manual override, not displayed additionally type ..SG 10(20) with modified throttle characteristics (see Chapter 3.4, "Characteristic lines") 	40	400	B → A = not permitted			
EMP 21 SG 20		40	400				
EMP 31 SG		80	350				
Proportional directional seated valve, proportional throttle							
EMP 21 V	pilot-controlled shifting	40	400	A → B			
EMP 21 V 10	<ul style="list-style-type: none"> type ..V 10(20,80) with modified throttle characteristics (see Chapter 3.4, "Characteristic lines") type ..VH with stroke limitation (see Chapter 4.1, "Valve and actuating solenoid") 	40	400	B → A = free flow, solenoid must be de-energised			
EMP 21 V 15		40	400				
EMP 21 V 20		40	400				
EMP 21 VH		40	400				
EMP 31 V		80	400				
EMP 31 V 80		80	400				
EMP 31 V 100		100	400				
EMP 31 VH		80	400				
EMP 31 VH 80		80	400				
EMP 31 VH 100		100	400				
EMP 41 V		160	350				
EMP 21 S		pilot-controlled shifting	40	400		A → B	
EMP 21 S 10		<ul style="list-style-type: none"> with manual override, not displayed additionally (see Chapter 3.4, "Characteristic lines") 	40	400		B → A = not permitted	
EMP 21 S 20	40		400				
EMP 31 S	80		400				

NOTICE

- Maximal permissible pressure only with basic blocks made of steel.
- If other materials have been used (e.g. cast iron, aluminium), pay attention to the potentially reduced strength of the thread.

! NOTICE

Directional seated valves with soft-shift (coding VG, SG) can only be actuated in the on/off positions. Cannot be used as a proportional throttle valve!

! NOTICE

A proportional amplifier is required to actuate the proportional directional seated valves. For the recommended components see Chapter 5.4, "Maintenance information"

2.1.2 Function block

A means of mechanically blocking the function of the valve (e.g. for emergency or set-up mode)

Coding	Description
without coding	without, series, with manual override
M	Wing nut (fitted at the side and sealed) Available for type EM 11 DS, EM 21 DS, EM 1. S and EM 2. S

2.1.3 Solenoid voltage and connector


Coding	Electrical connection	Nominal voltage	Protection class (IEC 60529)	EM 1 EM 2 EM 3	EMP 2 EMP 3 EMP 4	EMP 4
X 12, G 12 X 24, G 24 X 48, G 48 X 98, G 98 X 205, G 205 L 12 L 24 WG 110 WG 230	EN 175 301-803 A <ul style="list-style-type: none"> ▪ X: without line connector ▪ G: with line connector MSD3-309 ▪ L: with LED connector ▪ WG: with alternating rectifier in line connector 	12 V DC 24 V DC 48 V DC 98 V DC 205 V DC 12 V DC 24 V DC 110 V AC 50/60 Hz 230 V AC 50/60 Hz	IP 65	● ● ● ● ● ● ● ● ●	● ● ● ● ● ● ● ● ●	● ● ● ● ● ● ● ● ●
AMP 12 AMP 24 AMP 48	AMP Junior Timer	12 V DC 24 V DC 48 V DC	IP 65	● ● ●	● ● ●	● ● ●
DT 12 DT 24	GERMAN (DT 04-2P)	12 V DC 24 V DC	IP 69	● ●	● ●	● ●
K 12 K 24	KOSTAL (M27x1)	12 V DC 24 V DC	IP 67	● ●	● ●	
S 12 S 24	SCHLEMMER (bayonet PA 6)	12 V DC 24 V DC	IP 67	● ●	● ●	
M 24	M12x1	24 V DC	IP 65	●	●	
F 24	Free cable ends 600 mm	24 V DC	IP 69		●	
ITT 24	MIL-VG 95234	24 V DC	IP 67	●		
DTL 24	MIL-DTL-38999 series III	24 V DC	IP 67	●		

i INFORMATION


The specifications regarding the IP protection class apply for versions featuring a properly assembled male connector.

Connection pattern


G .., X .., L .. (WG ..)




S ..




DT ..




AMP ..




K ..




M ..




F ..



ITT ..



DTL ..



2.1.4 Seal

For seals that are in contact with the medium

Coding	Comment
without coding	Series, seals from NBR or AU, e.g. for mineral oil and HEES (synthetic ester)
PYD	FKM seals
AT	EPDM seals e.g. for glycol-based brake fluids (DOT4)

! NOTICE

For the seal specification coding PYD and AT, the maximum operating pressure is limited to 200 bar.

2.2 Single connection blocks

For direct pipe connection / for manifold mounting

2.2.1 Single connection blocks without/with drain valve

Ordering example

EMP 21 S -1/4 -G 24

2.2.1 "Single connection blocks without/with drain valve"

Single connection block



Coding	Circuit symbol	Ports	EM 11 D	EM 1. V	EM 21 D	EM 2. V	EM 3. V	EM 4. V
		A, B	EM 11 DS	EM 1. S	EM 21 DS	EM 2. S	EM 3. S	EM 4. S
pipe connection								
-1/4		G 1/4	•	•	•			
-3/8		G 3/8		•		•		
-1/2		G 1/2				•	•	
-3/4		G 3/4					•	•
-1		G 1						•
-1 5/16-12 UN		1 5/16-12UN-2B						•

Pipe connection additionally with (accumulator) drain valve *

NOTICE

* p_{max} at B = 200 bar

-1/4 A		G 1/4		•				
-3/8 A		G 3/8		•		•		
-1/2 A		G 1/2				•	•	
-3/4 A		G 3/4					•	•
-1 A		G 1						•

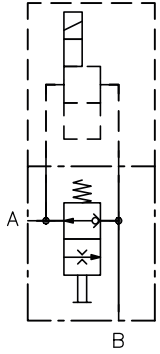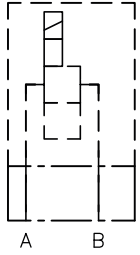Coding	Circuit symbol	Ports A, B	EM 11 D	EM 1. V	EM 21 D	EM 2. V	EM 3. V	EM 4. V
			EM 11 DS	EM 1. S	EM 21 DS	EM 2. S EMP 2. V EMP 2. S	EM 3. S EMP 3. V EMP 3. S	EM 4. S EMP 4. V
Pipe connection with bypass valve that can be switched manually								
-3/8 N 0.8		G 3/8				●		
-3/8 N 1.5		G 3/8				●		
manifold mounting								
-P		--			●		●	

2.2.2 Single connection block with additional functions

Ordering examples

EM 21V	- 1/2 F	- K 12
EM 11S	- 3/8 F - SB15H	- G 24
EM 11V	- 1/4 D	- K 12
EM 11S	- 3/8 DG 35	- G 24
EM 21S	- 3/8 SJ 07 C-6	- AMP 24

2.2.2 "Single connection block with additional functions"

Single connection block

Coding	Description	Circuit symbol	Ports		EM 1. V	EM. 2. V	EM. 3. V
			A, F	B	EM 1. S	EM. 2. S	EM. 3. S
-3/8 F	Swivel fitting with drain valve (accumulator drain valve)		G 3/8 A	G 3/8	●		
-1/2 F			G 1/2 A	G 1/2		●	
-3/4 F			G 3/4 A	G 3/4			●
-3/8 F - SB 1. -H -..	Swivel fitting, counterbalance valve according to D 6920 and drain valve, for details see "Coding for flow rate setting"		G 3/8 A	G 3/8	●		
-1/2 F - SB 2. -H -..			G 1/2 A	G 1/2		●	
NOTICE $p_{max} = 315 \text{ bar}$							
-1/4 D	With bypass throttle valve		G 1/4	G 1/4	●		
-3/8 D			G 3/8	G 3/8		●	
-3/8 DG..	With pressure switch according to D 5440, for details see "Coding for pressure range"		G 3/8	G 3/8	●		

Coding	Description	Circuit symbol	Ports		EM 1. V	EM. 2. V	EM. 3. V
			A, F	B	EM 1. S	EM. 2. S	EM. 3. S
-3/8 SJ 0. C..	With load-independent flow rate limitation in direction B → F with flow control valves type SJ according to D 7395, for details see "Coding for flow rate setting"		G 3/8	G 3/8		●	

NOTICE
p_{max} = 315 bar

Coding for flow rate setting

1/2 F - SB 2 . H -..
3/8 - SJ 0 . C -..

Desired flow rate setting
Flow rate setting

Coding	Adjustment range (l/min)		
	SB 1.	SB 2.	SJ 0.
1	2.5 ... 4	16 ... 21	1.0 ... 1.6
2	4 ... 6.3	21 ... 28.5	--
3	--	--	1.6 ... 2.5
5	6.3 ... 10	28 ... 37	2.5 ... 4.0
7	10 ... 16	37 ... 50	4.0 ... 6.4
9	16 ... 25	50 ... 57	6.4 ... 10.0
90	25 ... 35	--	10.0 ... 15.0

Coding for pressure range

3/8 DG ..


Pressure range

Coding	Adjustment range p _{max} (bar)
33	200 ... 700
34	100 ... 400
35	20 ... 250
36	4 ... 12
64	4 ... 50
365	12 ... 170

2.3 Valve bank BEM

Circuit symbol

BEM 11

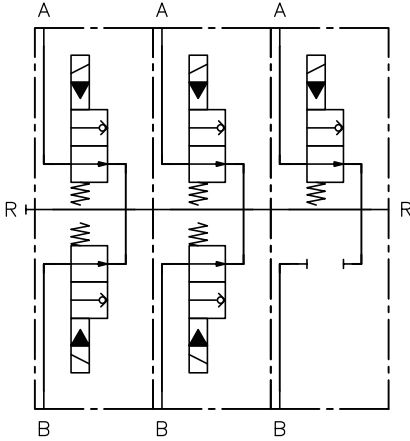

Ordering examples

BEM 11 -SS/SS/S -1/4 -G 12

2.1.3 "Solenoid voltage and connector"

"Threaded connection"

"Valve section"

"Basic type and size"

NOTICE

Compared to the series valves, (laterally flattened) solenoids are used (see Chapter 5, "Installation, operation and maintenance information")

Basic type and size

Type	Flow rate Q_{\max} (l/min)	Pressure p_{\max} (bar)
BEM 11	20	400

Valve section

i INFORMATION

A maximum of 10 valve sections can be combined.

Coding	Description	Circuit symbol	
SS VV SV VS	Twin valve (first letter port A, second letter port B) <ul style="list-style-type: none"> ▪ S-N/O contact, type EM 11 S ▪ V-N/C contact, type EM 11 V 		
S V	Single valve (B side sealed)		


Threaded connection

Coding	Ports (ISO 228-1)
	A, B, R
-1/4	G 1/4

2.4 Valve bank BEMD 21

Circuit symbol

BEMD 21

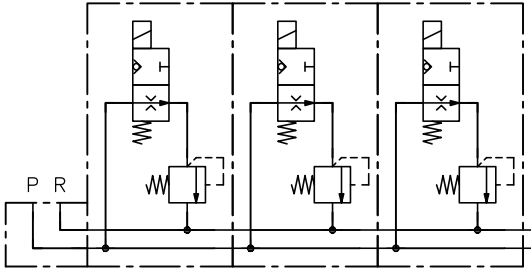

Ordering examples

BEMD 21	-DS 80 / DS 140 / DS 180	-G 24
	"Valve section", pressure setting (bar)	2.1.3 "Solenoid voltage and connector"
"Basic type and size"		

NOTICE

Compared to the series valves, (laterally flattened) solenoids are used (see Chapter 5, "Installation, operation and maintenance information")

Basic type and size

Type	Flow rate Q_{max} (l/min)	Pressure p_{max} (bar)
BEMD 21	3	400

Valve section

INFORMATION

A maximum of 10 valve sections can be combined.

Coding	Description	Circuit symbol
D	<ul style="list-style-type: none"> N/C contact, type EM 21 	
DS	<ul style="list-style-type: none"> N/O contact, type EM 21 DS 	

3 Parameters

3.1 General data

Designation	2/2-way directional seated valve
Design	Conical seat design
Model	Screw-in valve
Material	Steel; Valve housing zinc-nickel coated; Hardened and ground functional inner parts
Tightening torque	see Chapter 4, "Dimensions"
Installation position	As desired
	<div style="border: 1px solid gray; padding: 5px;"> <p>! NOTICE Ensure the valve is sufficiently vented. Recommendation: when installing the solenoid, suspend it to provide self-venting. If this is not possible, ensure the hydraulic system is sufficiently vented. If there is a difference in height between the tank and block, a corresponding pre-load will be required.</p> </div>
Ports/connections	<ul style="list-style-type: none"> ▪ A, P = input (pump or primary side) ▪ B = consumer (secondary side) ▪ R = reflux, tank
Flow direction	depending on type, see Chapter 2, "Available versions"
Hydraulic fluid	<p>Hydraulic fluid, according to DIN 51 524 Parts 1 to 3; ISO VG 10 to 68 according to DIN ISO 3448 Viscosity range: 4 - 1500 mm²/s Optimal operating range: approx. 10 - 300 mm²/s Also suitable for biologically degradable hydraulic fluids type HEPG (polyalkylene glycol) and HEES (synthetic ester) at operating temperatures up to approx. +70°C. Not suitable for water-based fluids and native oils (HETG).</p>
Cleanliness level	<p>ISO 4406</p> <hr style="width: 20%; margin-left: 0;"/> <p>20/17/14...18/15/12</p>
Temperatures	<p>Environment: approx. -40 to +80 °C, hydraulic fluid: -25 to +80 °C, pay attention to the viscosity range. Start temperature: down to -40 °C is permissible (take account of the start viscosities!), as long as the steady-state temperature is at least 20 K higher during subsequent operation. Biologically degradable hydraulic fluids: note manufacturer specifications. With consideration for the seal compatibility, not above +70°C.</p>
	<div style="border: 1px solid gray; padding: 5px;"> <p>! NOTICE Observe the limitation with regard to the permissible duty cycle of the solenoid, see Chapter 3.5, "Electrical data"</p> </div>

3.2 Pressure and volumetric flow

Operating pressure

$p_{\max} = 450$ bar (for limitation see Chapter 2.1.1, "Basic type and size")
for type EM..V: $p_{\min} = 2$ bar

Flow rate

see Chapter 2.1.1, "Basic type and size"

3.3 Weight



Screw-in valves	Type	
	EM 1	= 0.3 kg
	EM 2, EMP 2	= 0.35 kg
	EM 3, EMP 3	= 0.4 kg
	EM 4	= 0.6 kg
	EMP 4	= 0.7 kg
Single connection blocks	Type	
	EM 11 D (DS)	
	-1/4	= 0.2 kg
	EM 1. V(S)	
	-1/4	= 0.2 kg
	-3/8	= 0.25 kg
	-1/4 A	= 0.25 kg
	-3/8 A	= 0.35 kg
	-3/8 F	= 0.3 kg
	-1/4 D	= 0.45 kg
	-3/8 DG	= 0.55 kg
	EM 21 D(DS)	
	-1/4	= 0.5 kg
	-P	= 0.3 kg
	EM(P) 2. V(S)	
	-3/8	= 0.45 kg
	-1/2	= 0.45 kg
	-3/8 A	= 0.45 kg
	-1/2 A	= 0.45 kg
	-3/8 N 0.8	= 0.7 kg
	-3/8 N 1.5	= 0.7 kg
	-1/2 F	= 0.5 kg
	-3/8 D	= 0.55 kg
	-3/8 SJ 0. C..	= 0.55 kg
	EM(P) 3. V(S)	
	-1/2	= 1.4 kg
	-3/4	= 0.8 kg
	-1/2 A	= 0.85 kg
	-3/4 A	= 0.85 kg
	-P	= 0.75 kg
	-3/4 F	= 1.0 kg
	EM(P) 4. V(S)	
	-3/4	= 1.0 kg
-1	= 1.3 kg	
-1 5/16-12 UN	= 2.0 kg	
-3/4 A	= 1.0 kg	
-1 A	= 1.35 kg	




3.4 Characteristic lines



Viscosity of the hydraulic fluid approx. 60 mm²/s

Δp-Q characteristic lines

- A → B EM(P)...V solenoid excited
- EM 11 D(S)..; EM 21 D(S); EM(P)...S solenoid, de-energised

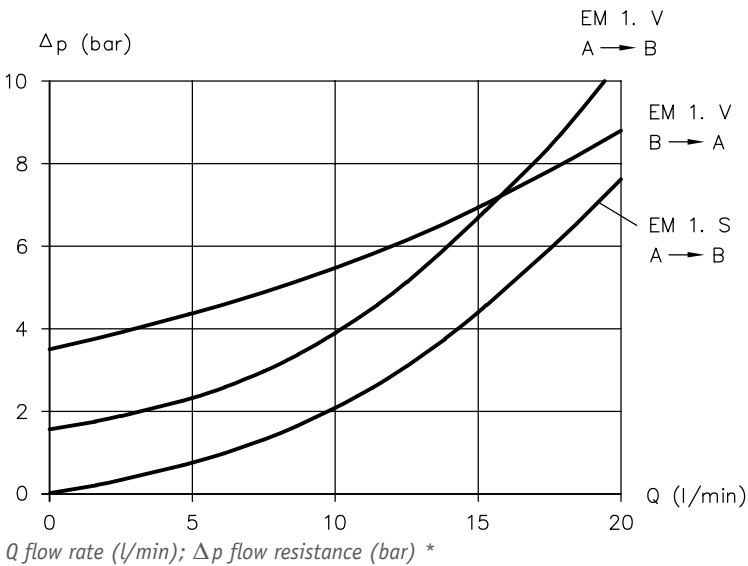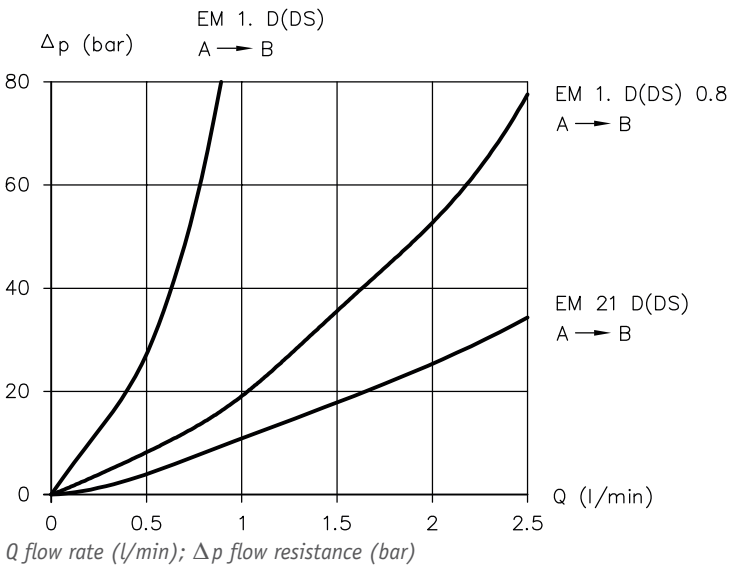



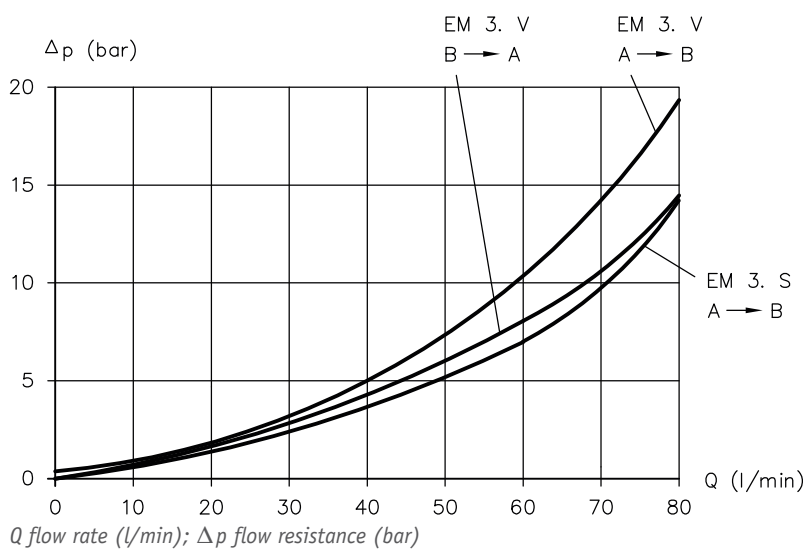
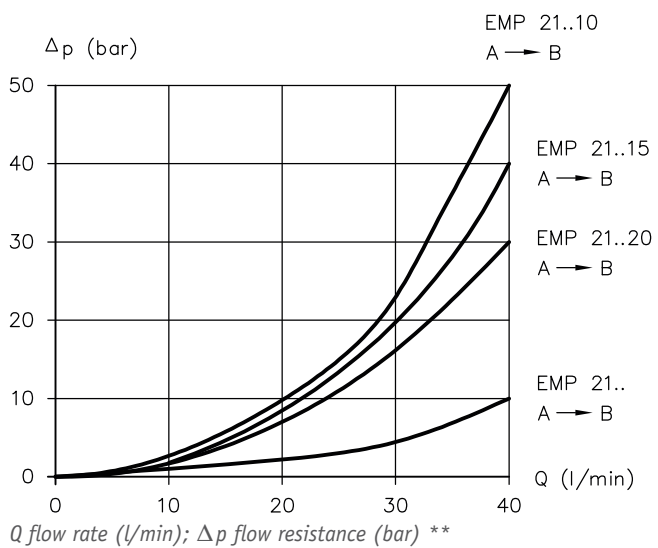
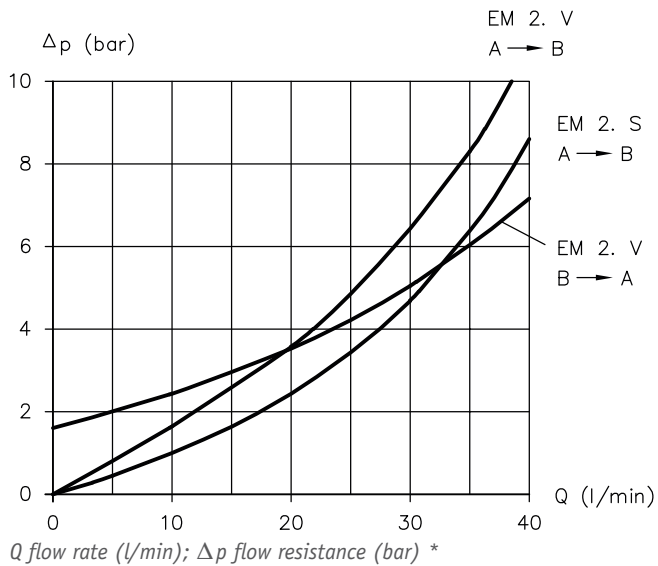


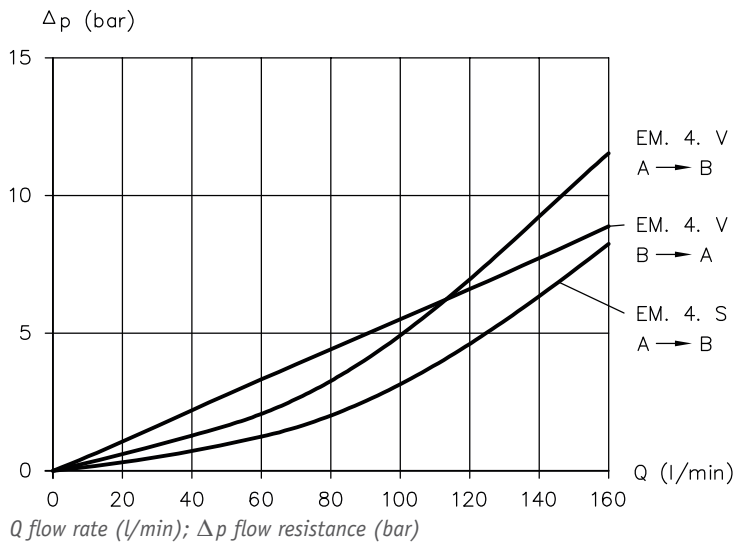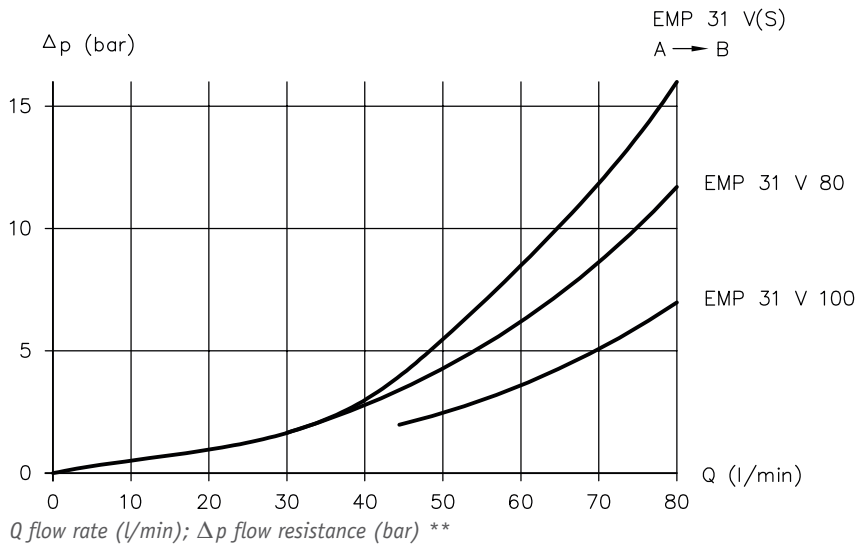

* Only for type EM...V: free flow from B → A only possible with de-energised solenoid


** Also applies to type EMP.. VG..(SG.): flow directions that are not shown act in the same way as type EM.. with the same size

I-Q characteristic lines


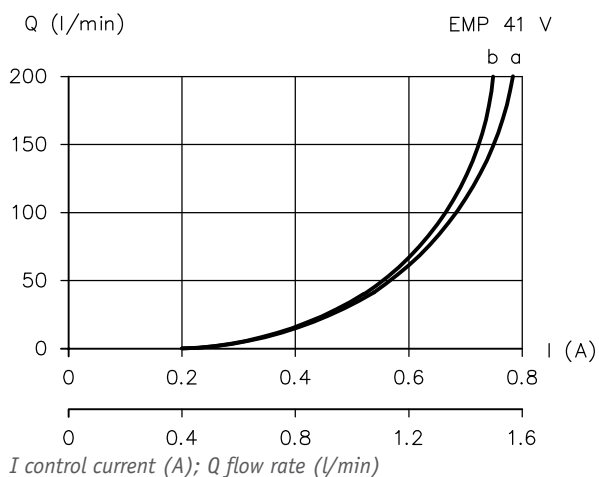
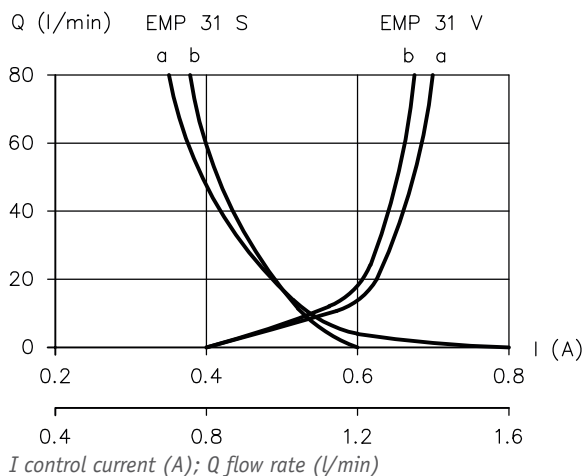
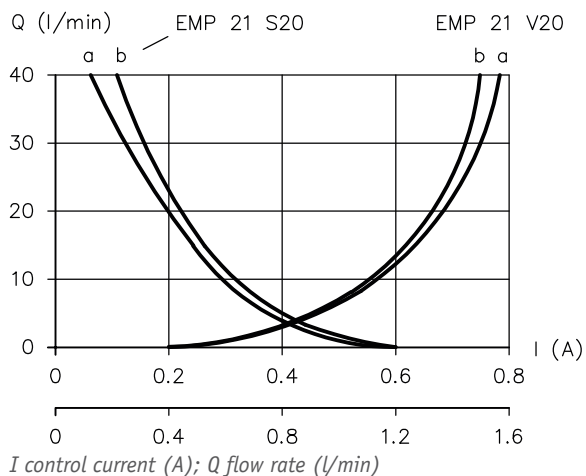
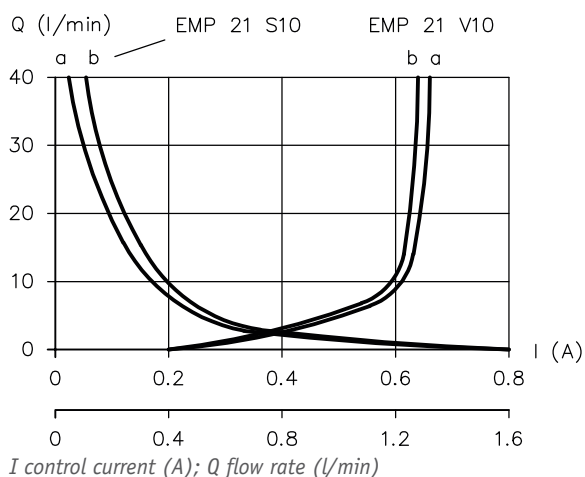
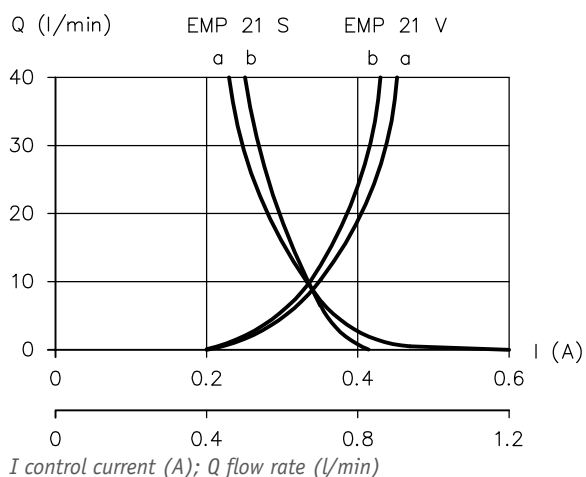


- Curve a: load pressure $p = 50$ bar
- Curve b: load pressure $p = 200$ bar

3.5 Electrical data

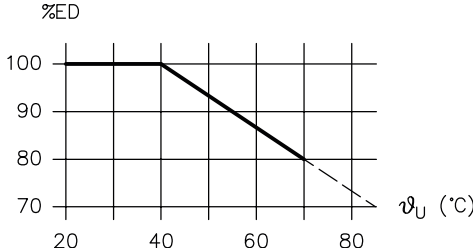Nominal power P_N		12 V DC	24 V DC	48 V DC	98 V DC	205 V DC
	EM 1.., EM 2.., EM 3..	21 W	21 W	21 W	21 W	21 W
	EMP 2.., EMP 3.., EM 4..	32 W	32 W	32 W	32 W	32 W
	EMP 4..	30 W	30 W	--	--	--
Current, cold I_{20}	EM 1.., EM 2.., EM 3..	1.75 A	0.89 A	0.44 A	0.2 A	0.1 A
	EMP 2.., EMP 3.., EM 4..	2.67 A	1.33 A	0.67 A	0.3 A	0.15 A
	EMP 4..	2.5 A	1.25 A	--	--	--
Limit current I_G	EM 1.., EM 2.., EM 3..	1.23 A	0.62 A	0.31 A	--	--
	EMP 2.., EMP 3.., EM 4..	1.87 A	0.93 A	0.47 A	--	--
	EMP 4..	1.75 A	0.88 A	--	--	--
Switching times approx. (ms)	EM..S: in 150 out 50	EM..V: in 50 out 150	<ul style="list-style-type: none"> ▪ In the case of version WG.., approx. 2 to 3 times larger ▪ For type EMP.. VG.. and EMP.. SG.. 5 ... 10 times larger 			
Switching operations	Approx. 2000/h, to be seen as approximately evenly distributed					
Insulation material class	F Contact temperature at 20° ambient temperature approx. 85 – 95°C (cladding). In adhering to the reference values for % duty cycle in operation, the permissible winding limit temperature of approx. 150°C according to insulation material class F is approximately reached as a steady-state temperature.					
Relative duty cycle 100% duty cycle (specified on solenoid)	Reference value and restriction in operation  <p style="text-align: center;">ϑ_U ambient temperature (°C); % duty cycle</p> <div style="border: 1px solid gray; padding: 5px; margin-top: 10px;"> <p>! NOTICE The thermal load of the coil can be reduced by means of an economy circuit, for example.</p> </div>					
Protection class	Depending on the actuating solenoid, see Chapter 2.1.3, "Solenoid voltage and connector"					
Electrical connection	Depending on the actuating solenoid see Chapter 2.1.3, "Solenoid voltage and connector"					

For circuit diagrams

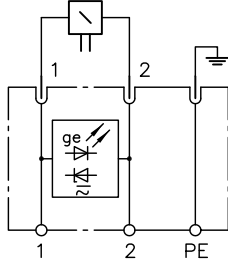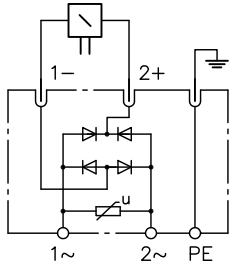
DC voltage	G .., X ..	DT .., K .., S .., AMP .., F ..	L ..
			
	M ..	ITT .., DTL ..	
			
AC voltage	WG 110, WG 230		
			
	For the required connection parts, see Chapter 6.1, "Accessories, spare and individual parts"		
Cut-off energy	Approx. < 10 Ws of maximum reference value + approx. 10% from measurements at nominal voltage U_n		
Dither frequency for type EMP	50 ... 150 Hz		

4 Dimensions

All dimensions in mm, subject to change.

4.1 Valve and actuating solenoid

Coding **G.., WG.., X.., L..**

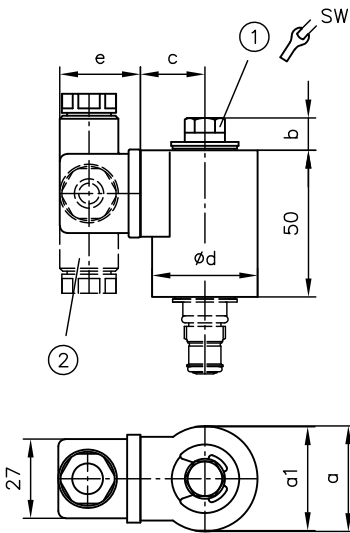


SW = Width across flats

- 1 Manual override for EM(P) ... S
- 2 Line connector can be mounted offset by 90° each

Version	e
G	28
WG	34.5
L	40


Type	a	a1	b	c	Ød	SW	Tightening torque (Nm)
EM 1..	36.5	--	12	22	36.5	12	30
EM 2..	36.5	--	12	22	36.5	12	30
EM 3..	36.5	--	12	22	36.5	12	60
EM 4..	--	37.5	15	25	38.5	14	90
EMP 2..	--	37.5	15	25	38.5	14	30
EMP 3..	--	37.5	15	25	38.5	14	60
EMP 4..	∅37	--	18.3	28	∅37	19	90

EM .. ST (button for manual actuation)




NOTICE
100 bar corresponds to approx. 90 N

EM .. S-M (wing nut, attached to side upon delivery)



NOTICE
Max. tightening torque: 1 Nm, use when de-pressurised


EMP .. VH (stroke limitation)




INFORMATION
The stroke limitation type VH is not set upon delivery, i.e. the threaded screw is completely unscrewed, meaning the flow is not limited. To limit the flow, undo the lock nut and screw in the threaded screw clockwise. Tightening torque of lock nut: 9.0 - 10.1 Nm

Actuating solenoid


Coding AMP..




Coding K..




Coding S..

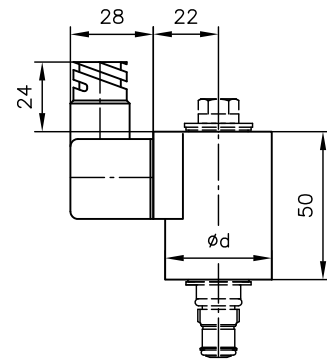


Coding M..




Coding DT..
EM 1.., EM 2.., EM 3..




Coding DT..
EM 4.., EMP 2.., EMP 3..

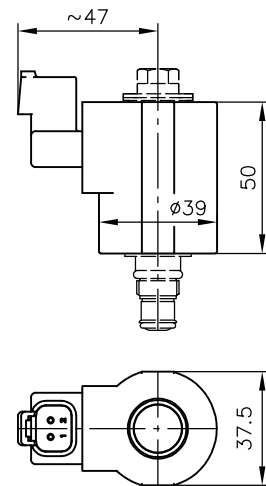


Coding DT..
EMP 4..

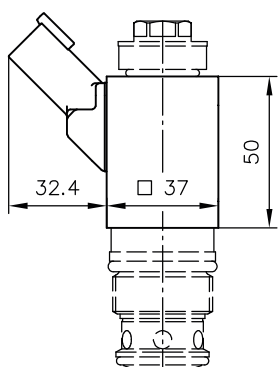


Coding ITT..



Coding DTL..

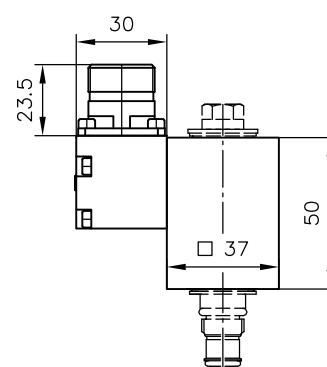

Coding F..

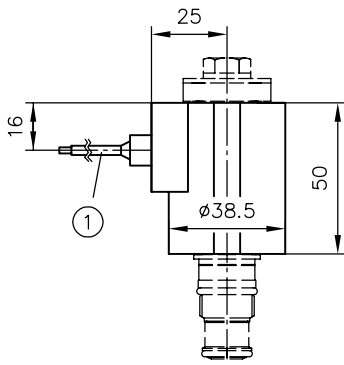


1 Approx. 600 mm




Type	$\varnothing d$
EM 1..	36.5
EM 2..	36.5
EM 3..	36.5
EM 4..	38.5
EMP 2..	38.5
EMP 3..	38.5
EMP 4..	$\varnothing 37$



4.2 Screw-in valve

EM 11 D, EM 11 DS
EM 11 D 0.8, EM 11 DS 0.8





EM 1. V, EM 1. S

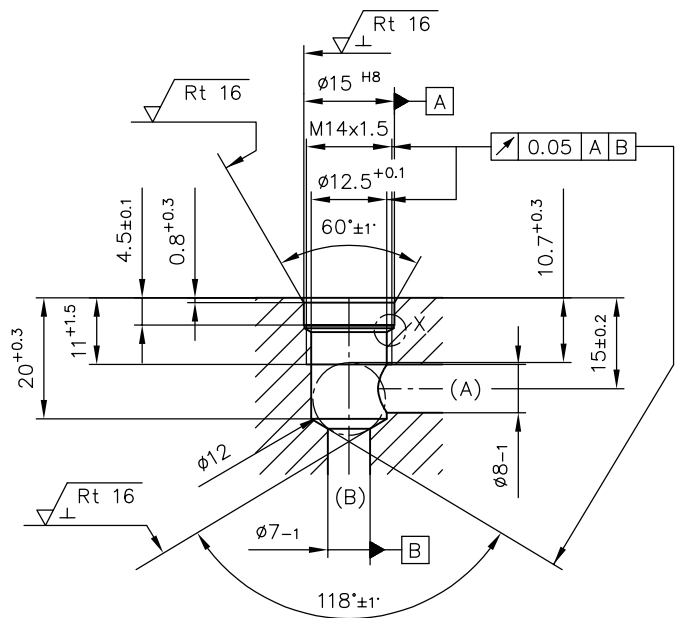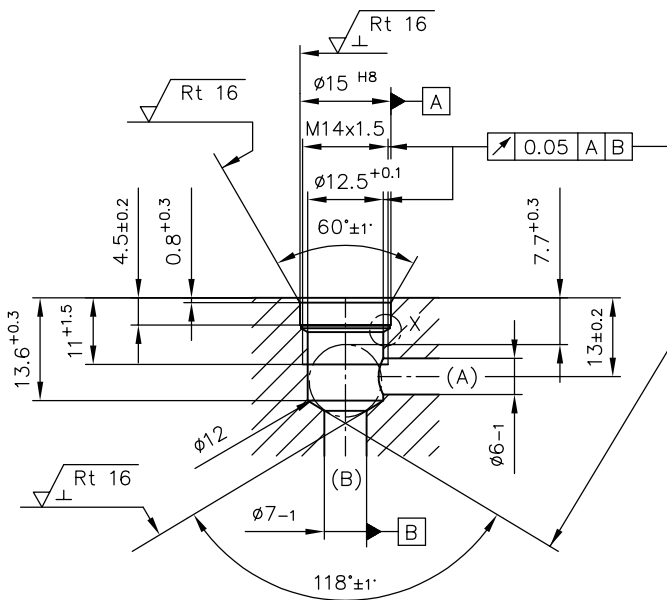

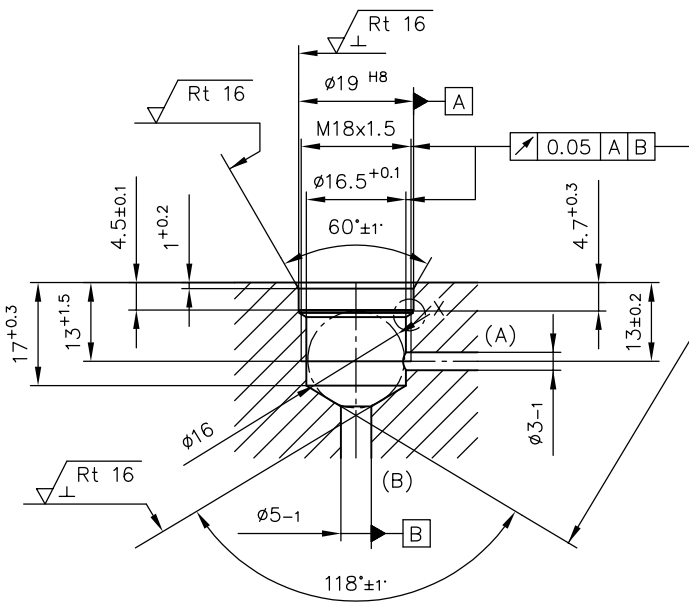
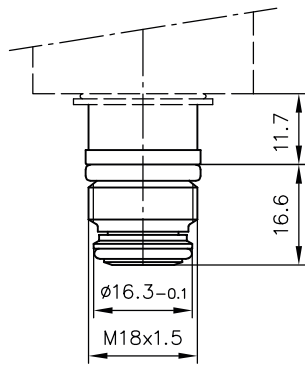


EM 2. V, EM 2. S
EMP 21 VG, EMP 21 SG
EMP 21 V., EMP 21 S..

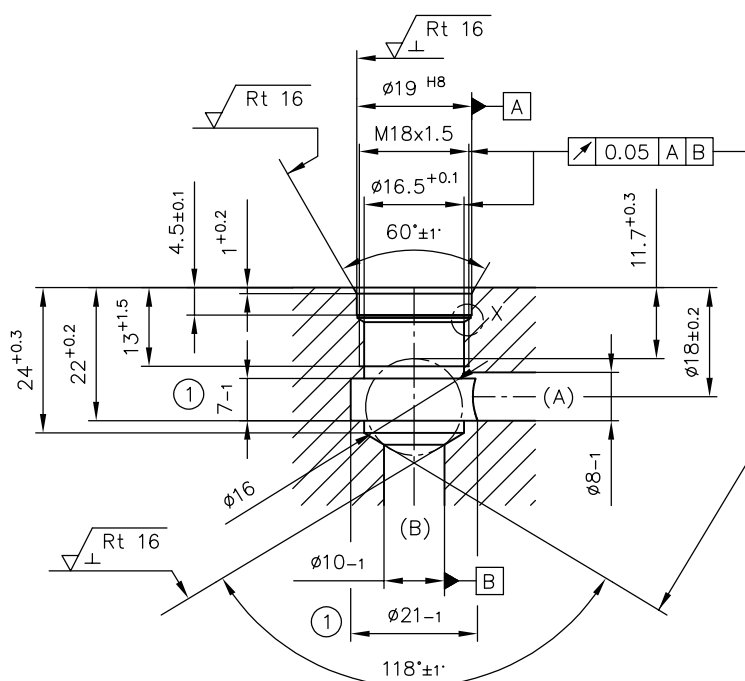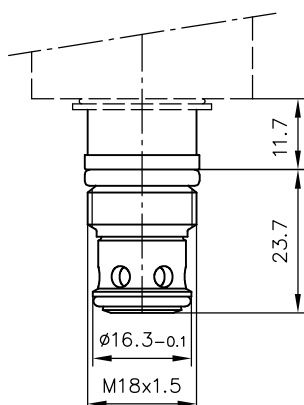



- 1 Insertion optional:
Insertion to reduce the flow resistance, not necessary for functional-technical reasons

EM 3. V, EM 3. S
EMP 31 VG, EMP 31 SG
EMP 31 V., EMP 31 S..

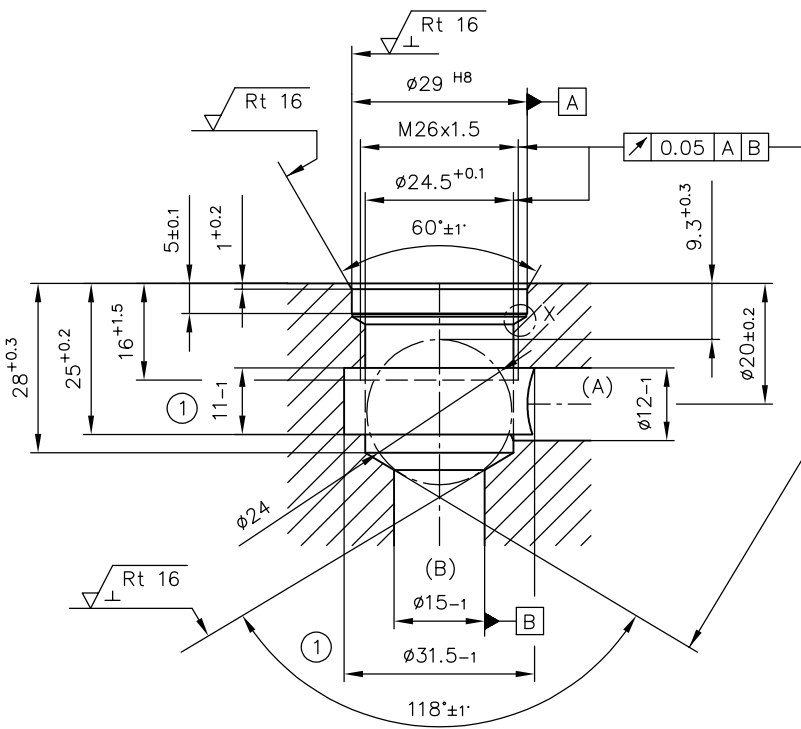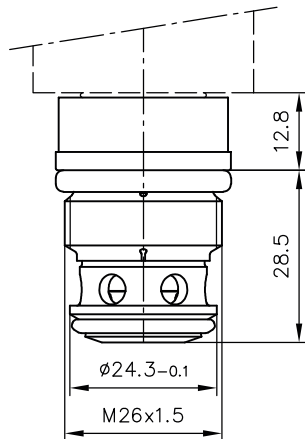


- 1 Insertion optional:
Insertion to reduce the flow resistance, not necessary for functional-technical reasons

EM 4. V, EM 4. S,
EMP 41 V..

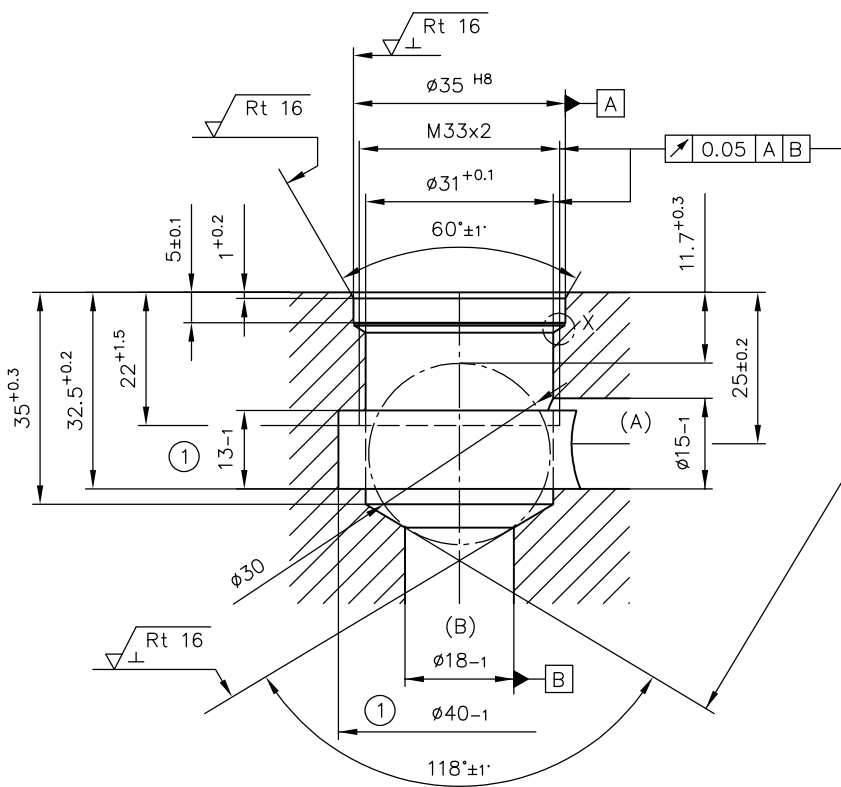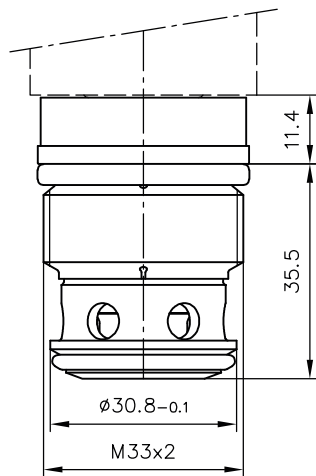

- 1 Insertion optional:
Insertion to reduce the flow resistance, not necessary for functional-technical reasons

Detail X

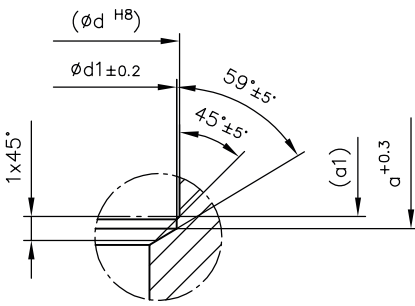

Type	$\varnothing d$	$\varnothing d1$	a	a1
EM 1.	15	14.75	5	4.5
EM 2., EMP 2.	19	18.75	5	4.5
EM 3., EMP 3.	29	28.75	5.5	5
EM 4., EMP 4.	35	34.75	5.5	5


NOTICE

The 118° shoulder of the stepped bore is tolerated in its angular position to the centring bore $\varnothing d^{H8}$ (reaming depth).

- This tolerance must be adhered to.
- See the information in Chapter 5, "Installation, operation and maintenance information".

4.3 Single connection block


Coding - 1/4, - 3/8, - 1/2, - 3/4, - 1, - 1 5/16-12 UN

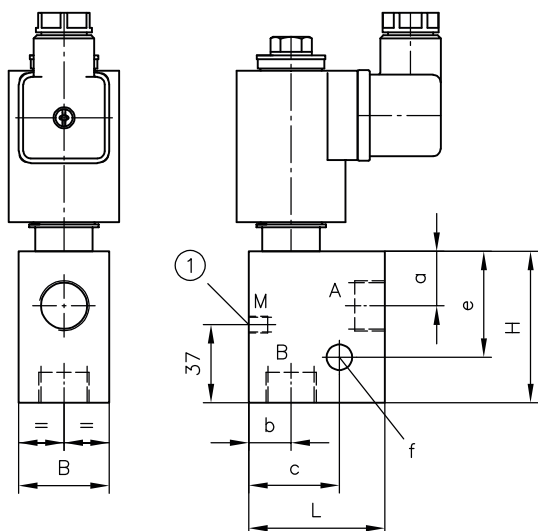

1 only for coding - 1 5/16-12 UN

Type	Coding	Ports (ISO 228-1)	Principal dimensions (mm)								Order no. for connection block without valve
			A, B	L	B	H	a	b	c	e	
EM 11 D.. EM 11 DS..	- 1/4	G 1/4	35	20	40	14.5	10	25	30	Ø6.5	7490 013
EM 1. V(S)	- 1/4	G 1/4	35	20	40	16	10	25	30	Ø6.5	7490 010
	- 3/8	G 3/8	40	25	40	16	15	32	32	Ø6.5	7490 011
EM 21 D(DS)	- 1/4	G 1/4	45	30	50	13	14	30	35	Ø8.5	7902 310
EM 2. V(S) EMP 2. V(S)	- 3/8	G 3/8	45	30	50	18	14	30	35	Ø8.5	7491 012
	- 1/2	G 1/2	50	30	50	18	14	32	35	Ø8.5	7491 013
EM 3. V(S) EMP 3. V(S)	- 1/2	G 1/2	55	40	60	20	20	37	38	Ø10.5	7590 011
	- 3/4	G 3/4	60	40	60	20	20	40	40	Ø10.5	7590 012
EM 4. V(S) EMP 4. V(S)	- 3/4	G 3/4	65	40	70	25	22	50	55	Ø12.5	7591 011
	- 1	G 1	70	50	70	25	22	55	55	Ø12.5	7591 012
	- 1 5/16-12 UN	1 5/16-12 UN-2B (M: 7/16-20 UNF-2B)	81	51	85	25	28	63	60	M12, 12 deep	7591 018



Coding - 1/4 A, - 3/8 A, - 1/2 A, - 3/4 A, - 1 A

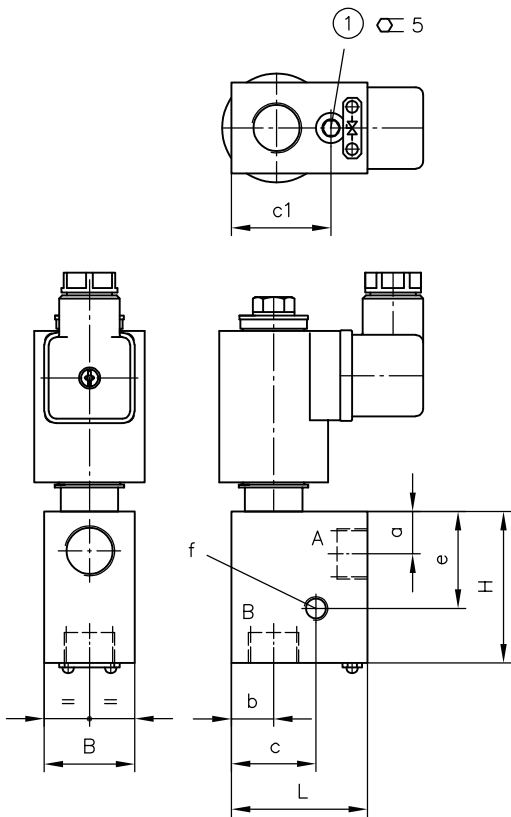

1 Drain valve


Type	Coding	Ports (ISO 228-1)	Principal dimensions (mm)									Order no. for connection block without valve
			A, B	L	B	H	a	b	c	c1	e	
EM 1. V(S)	- 1/4 A	G 1/4	40	20	45	13	10	35	27	25	Ø6.3	7490 038
	- 3/8 A	G 3/8	45	25	45	13	15	40	33	27	Ø6.3	7490 039
EM 2. V(S) EMP 2. V(S)	- 3/8 A	G 3/8	45	30	50	15	14	27	33	30	M8, 8 deep	7491 015
	- 1/2 A	G 1/2	50	30	50	15	14	30	36	30	M8, 8 deep	7491 016
EM 3. V(S) EMP 3. V(S)	- 1/2 A	G 1/2	56	40	60	20	20	34	42	36	M10, 10 deep	7590 015
	- 3/4 A	G 3/4	60	40	60	20	20	40	46	40	M10, 10 deep	7590 016
EM 4. V(S)	- 3/4 A	G 3/4	65	40	70	25	22	41	49	45	M12, 12 deep	7591 015
	- 1 A	G 1	70	50	70	25	22	47	51.5	50	M12, 12 deep	7591 016

Coding - 3/8 N 0.8, - 3/8 N 1.5

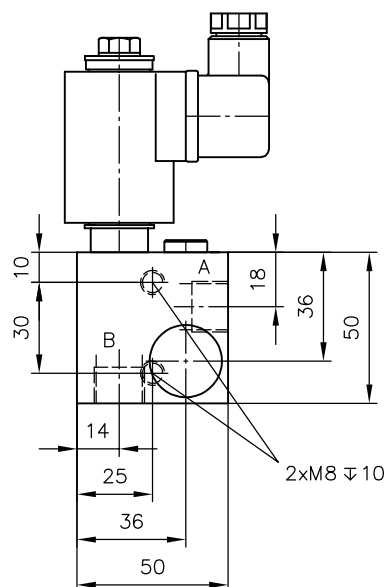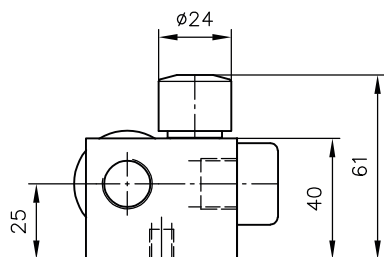


Type	Coding	Ports (ISO 228-1) A, B	Order no. for connection block without valve
EM 2. V(S)	- 3/8 N 0.8	G 3/8	7902 150
EMP 2. V(S)	- 3/8 N 1.5		

EM 21 D - P
EM 21 DS - P

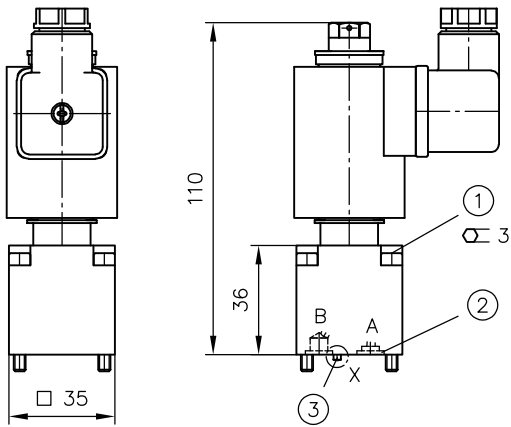


- 1 Cylinder screw M4x35-12.9 ISO 4762
- 2 O-ring 6x1.5 NBR 90 Sh
- 3 Mounting centring pin

Detail X



EM 3. - P
EMP 3. - P

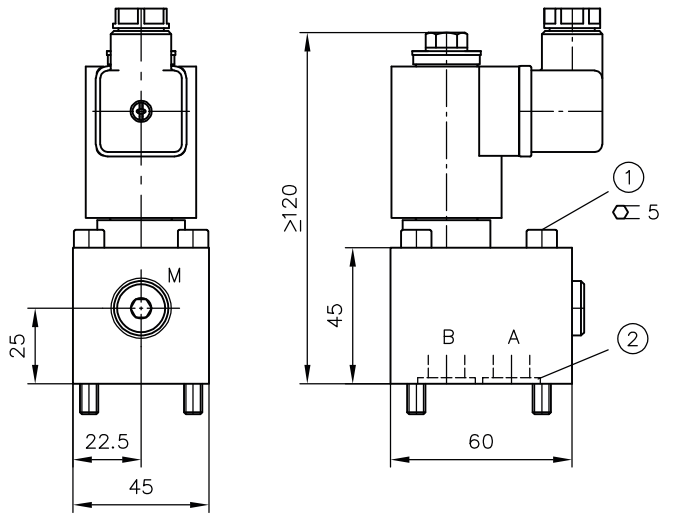


- 1 Cylinder screw M6x55 ISO 4762
- 2 O-ring 13.95x2.62 NBR 90 Sh


Type	Coding	Order no. for connection block without valve
EM 21 D(DS) EM 3. EMP 3.	- P	7902 360 7903 140 B

Hole pattern of the base plate

EM 21 D - P
EM 21 DS - P

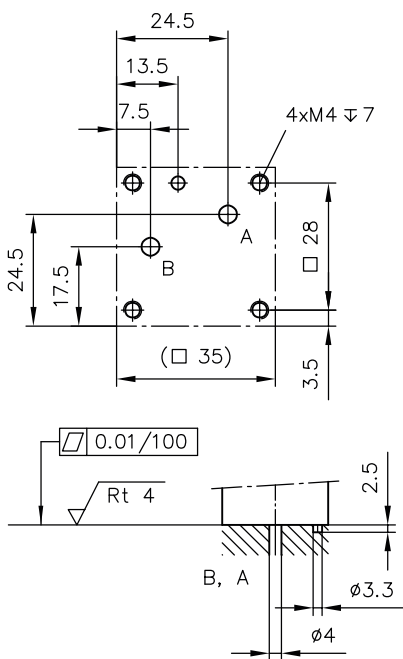

EM 3. - P
EMP 3. - P

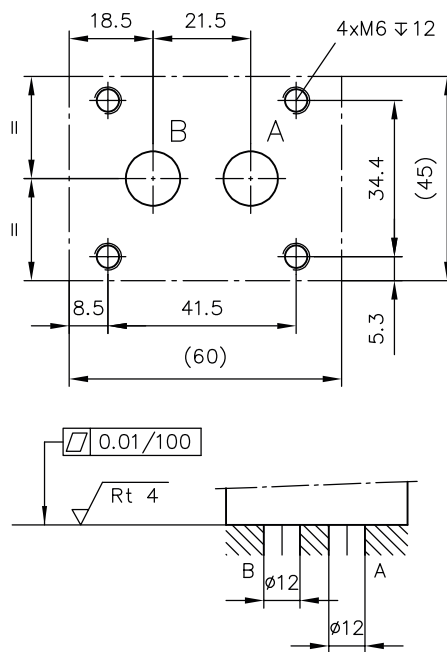


NOTICE

Attachment options (dimension f):

∅.. -Through bore, thread specification M..; Thread present on both sides (- 3/8 N.. is an exception, only on rear).

4.3.1 Single connection block with additional function


EM 1. - .F, EM 2. - .F, EM 3. - .F
 EMP 2. - .F, EMP 3. - .F

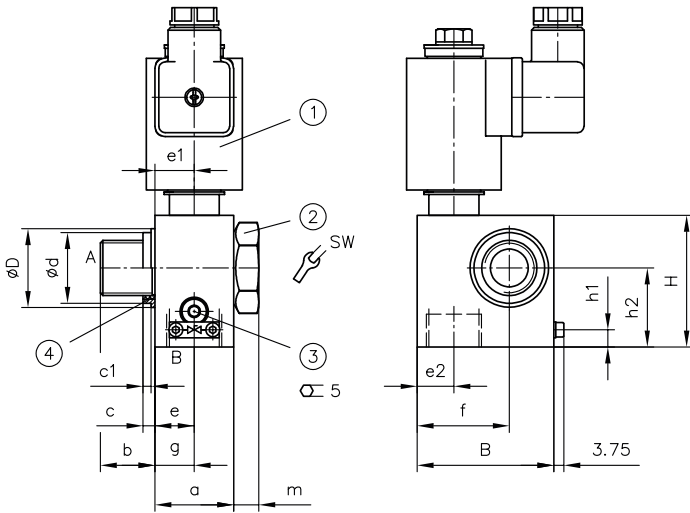

SW = Width across flats

- 1 Each rotatable by 360°
- 2 Banjo bolt can be mounted on both sides for - 3/4 F
- 3 Drain valve
- 4 Sealing ring

EM 1. - .F - SB 1. H, EM 2. - .F - SB 2. H
 EMP 2. - .F - SB 2. H

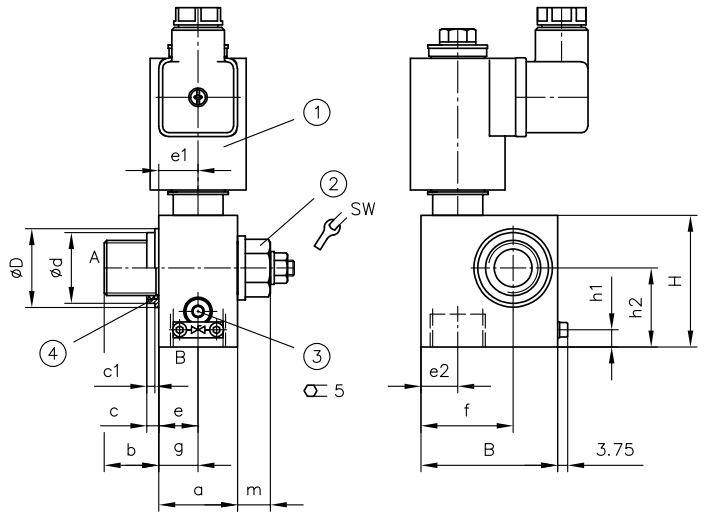


- 1 Each rotatable by 360°
- 2 Counterbalance valve screw-in cartridge according to [D 6920](#)
- 3 Drain valve
- 4 Sealing ring


Type	B	H	∅D	a	b	c	c1	∅d	e	e1	e2	f	h1	h2	g	m	SW
EM 1. -3/8 F	45	40	24	25	15	3	2.1	21.9	12.5	15.5	12	30	12.5	27	18	7.5	24
EM 1. -3/8 F -SB1. H	45	40	24	25	15	3	2.1	21.9	12.5	15.5	12	30	12.5	27	18	11	17
EM 2. -1/2 F EMP 2. -1/2 F	52	50	30	30	20.7	4.5	2.6	26.9	15	15	14	35	13.5	30	15	9.5	30
EM 2. -1/2 F -SB2. H EMP 2. -1/2 F -SB2. H	52	50	30	30	20.7	4.5	2.6	26.9	15	15	14	35	13.5	30	15	12.5	19
EM 3. -3/4 F EMP 3. -3/4 F	70	60	--	40	19.5	5	--	36	20	20	20	50	18	40	20	10	36

Type	Ports (ISO 228-1)	
	A	B
EM 1. -3/8 F EM 1. -3/8 F -SB1. H	G 3/8 A	G 3/8
EM 2. -1/2 F EMP 2. -1/2 F EM 2. -1/2 F -SB2. H EMP 2. -1/2 F -SB2. H	G 1/2 A	G 1/2
EM 3. -3/4 F EMP 3. -3/4 F	G 3/4 A	G 3/4

EM 1. - 1/4 D, EM 2. - 3/8 D
EMP 2. - 3/8 D

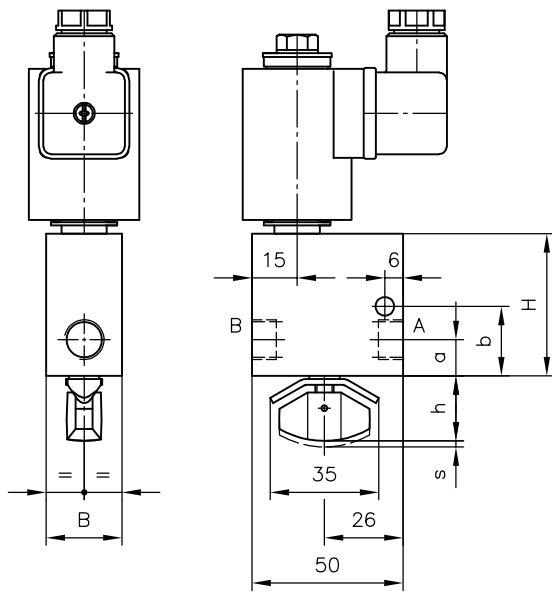


EM 2. - 3/8 - SJ 0.
EMP 2. - 3/8 - SJ 0.

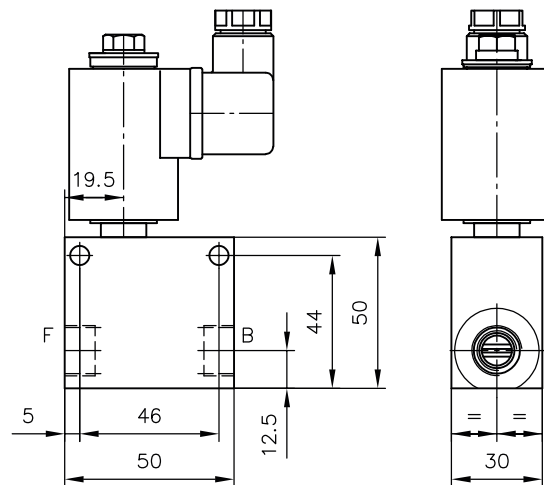

Type	B	H	a	b	h	s
EM 1. -1/4 D	25	47	12	23	21.5	2
EM 2. -3/8 D EMP 2. -3/8 D	55	62	13.5	34	27	3


EM 1. - 3/8 DG

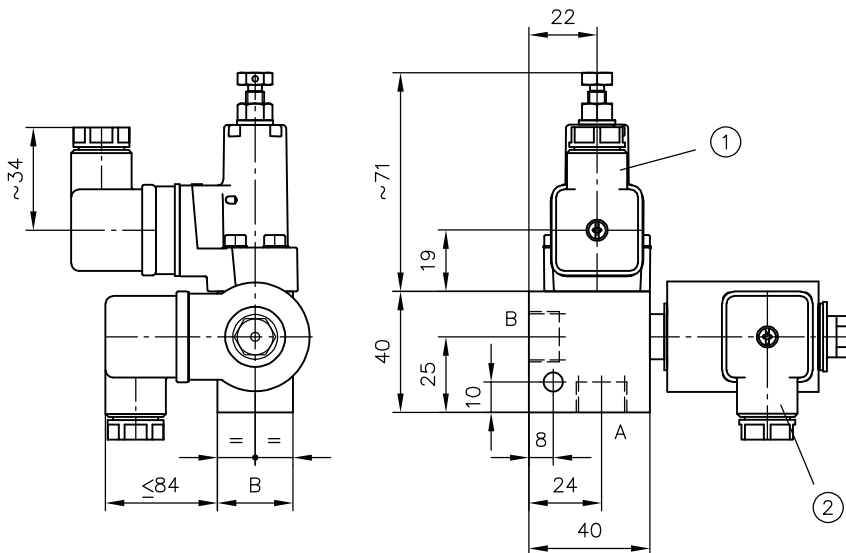


- 1 For missing information see D 5440 (DG 3..)
- 2 Plug can be mounted offset by $4 \times 90^\circ$

4.4 Valve bank

BEM 11

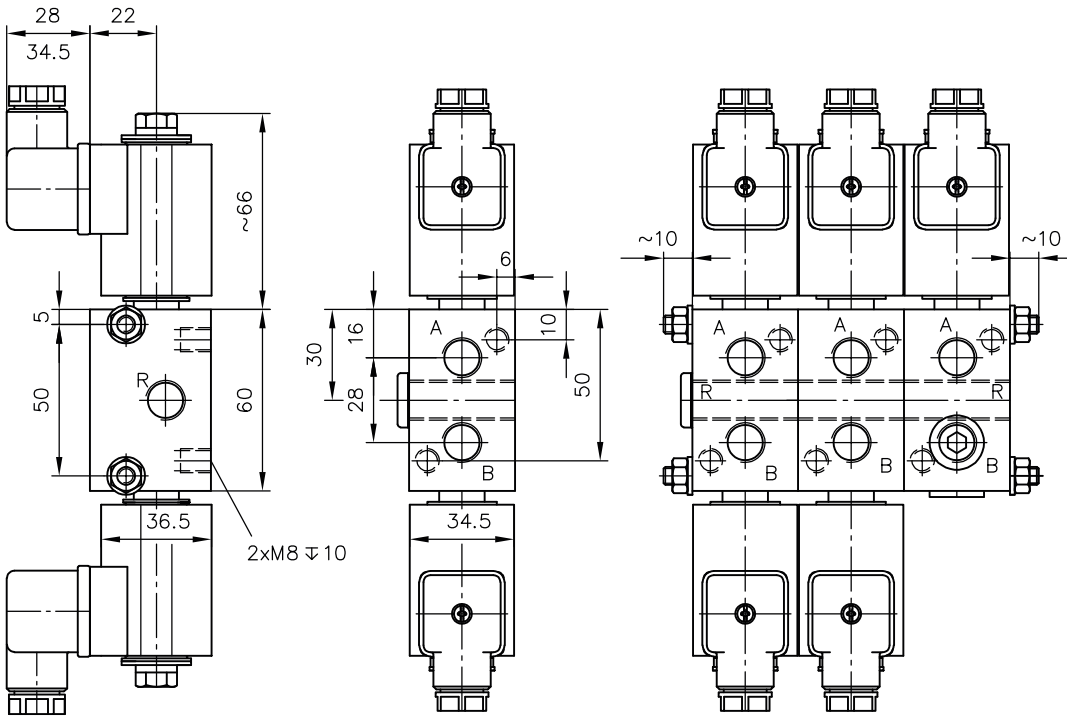

BEMD 21

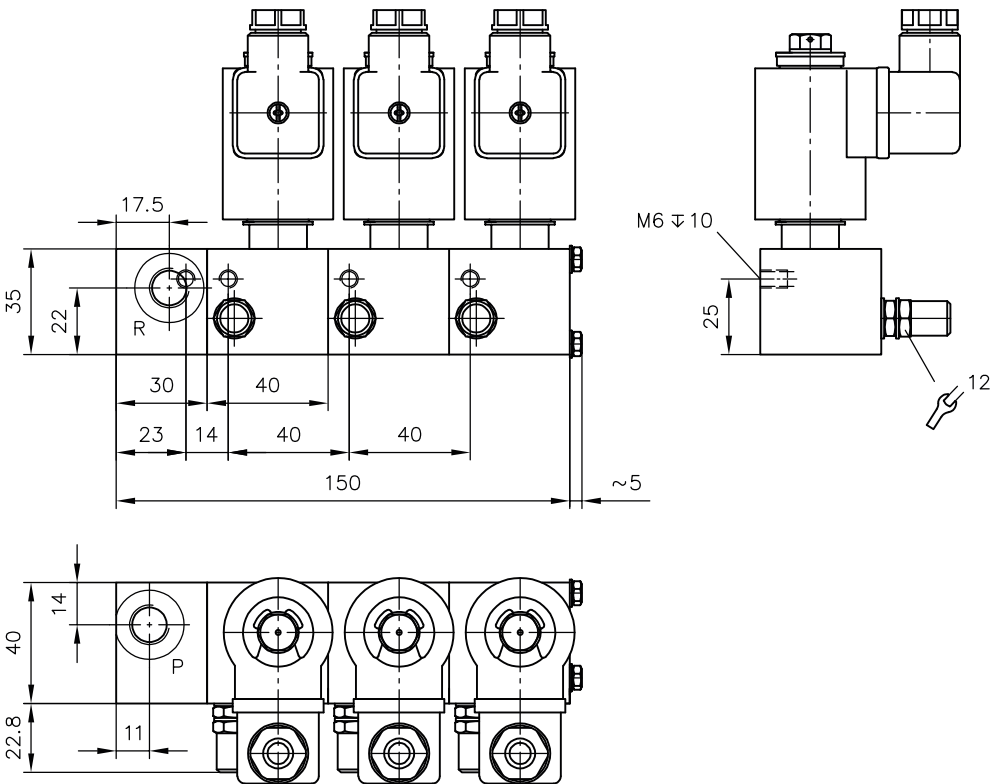

5**Installation, operation and maintenance information**

Observe the document B 5488 "General operating instructions for assembly, commissioning, and maintenance."

5.1 Intended use

This product is intended exclusively for hydraulic applications (fluid technology).

The user must observe the safety measures and warnings in this document.

Essential requirements for the product to function correctly and safely:

- ▶ All information in this documentation must be observed. This applies in particular to all safety measures and warnings.
- ▶ The product must only be assembled and put into operation by specialist personnel.
- ▶ The product must only be operated within the specified technical parameters described in detail in this document.
- ▶ All components must be suitable for the operating conditions when using an assembly.
- ▶ The operating instructions for the components, assemblies and the specific complete system must also always be observed.

If the product can no longer be operated safely:

1. Remove the product from operation and mark it accordingly.
 - ✓ It is then not permitted to continue using or operating the product.

5.2 Assembly information

The product must only be installed in the complete system with standard and compliant connection components (screw fittings, hoses, pipes, fixtures etc.).

The product must be shut down correctly prior to disassembly (in particular in combination with hydraulic accumulators).

**DANGER****Sudden movement of the hydraulic drives when disassembled incorrectly**

Risk of serious injury or death


- ▶ Depressurise the hydraulic system.
- ▶ Perform safety measures in preparation for maintenance.

5.2.1 Notes on commissioning

In accordance with Chapter 4, "Dimensions", the 118° shoulder of the stepped bore is tolerated in its angular position to the centring bore $\varnothing d_{H8}$ (reaming depth). This enables a larger edge force on the facial area of the housing journal when the valve is tightened and it also prevents lateral distortion of function elements which might cause sticking.

The accuracy of the angular position can be checked when installing the EM valve and corrected if there are minor deviations.

1. Screw in the valve and quickly tighten it to the specified torque according to Chapter 4, "Dimensions".
2. Unscrew the valve again. The edge **a** running all around the head end of the valve housing must leave behind a uniform, ring-like impression **b** on the stepped bore.
3. If this is the case, screw in and secure the valve again as stated in step 1.
4. If the ring impression **b** is not closed or is significantly weaker on one side, screw the valve in again and secure with a tightening torque approx. 1.2x that stated in step 1. Then check as in step 2. This is normally sufficient for making the impression more even.
5. Then screw the valve in again as in step 1 and secure. Otherwise, rework the bore.

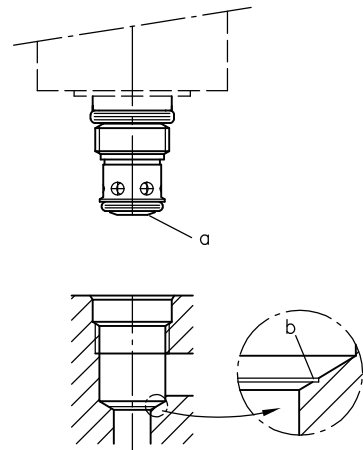

5.2.2 Creating the mounting hole

see Chapter 4, "Dimensions"

5.2.3 Setting the stroke limitation

see Chapter 4, "Dimensions"

5.3 Operating instructions

Observe product configuration and pressure/flow rate.

The statements and technical parameters in this document must be strictly observed. The instructions for the complete technical system must also always be followed.

! NOTICE

- ▶ Read the documentation carefully before usage.
- ▶ The documentation must be accessible to the operating and maintenance staff at all times.
- ▶ Keep documentation up to date after every addition or update.

⚠ CAUTION

Overloading components due to incorrect pressure settings.

Risk of minor injury.

- Pay attention to the maximum operating pressure of the pump, valves and fittings.
- Always monitor the pressure gauge when setting and changing the pressure.

Purity and filtering of the hydraulic fluid

Fine contamination can significantly impair the function of the product. Contamination can cause irreparable damage.

Examples of fine contamination include:

- Swarf
- Rubber particles from hoses and seals
- Dirt due to assembly and maintenance
- Mechanical debris
- Chemical ageing of the hydraulic fluid

! NOTICE

New hydraulic fluid from the manufacturer may not have the required purity.

Damage to the product is possible.

- ▶ Filter new hydraulic fluid to a high quality when filling.
- ▶ Do not mix hydraulic fluids. Always use hydraulic fluid that is from the same manufacturer, of the same type, and with the same viscosity properties.

For smooth operation, pay attention to the cleanliness level of the hydraulic fluid (cleanliness level see Chapter 3, "Parameters").

Additionally applicable document: [D 5488/1](#) Oil recommendations

5.4 Maintenance information

Check regularly (at least once a year) by visual inspection whether the hydraulic connections are damaged. If external leakages are found, shut down and repair the system.

Clean the surface of the device regularly (at least once a year) (dust deposits and dirt).

Check that the product is securely fastened in the mounting hole at regular intervals, but at least once per year.

6 Other information


6.1 Accessories, spare and individual parts

To purchase spare parts, please see [HAWE Hydraulik interactive contact map](#).

6.1.1 Tapped plugs

The mounting holes can be sealed with tapped plugs if necessary; for example, if the assembly of standardised basic bodies is to be carried out with or without screw-in valves as required.


Passage open



SW = Width across flats

- 1 Tapped plug
- 2 O-ring P5001 94 Sh

Passage blocked



- 1 Locking tapped plug
- 2 O-ring P5001 94 Sh
- 3 O-ring NBR 90 Sh

Type	Tapped plug	Locking tapped plug	SW	Tightening torque (Nm)	O-ring	
					P5001 94 Sh	NBR 90 Sh
EM 1.. V(S)	7490 105 b	7490 105 a	6	30	10.3x2.4	7.65x1.78
EM 11 D(DS)	7490 105 b	7490 105 c	6	30	10.3x2.4	7.65x1.78
EM(P) 2.. V(S)	7491 105 b	7491 105 a	8	30	14.03x2.61	12.42x1.78
EM 21 D(DS)	7491 105 b	7902 315 a	8	30	14.03x2.61	12.42x1.78
EM(P) 3..	7590 105 b	7590 105 a	12	40	21x3.53	18.72x2.62
EM(P) 4..	7904 019	7904 018	14	60	28.17x3.53	25.07x2.62

6.1.2 Seal kits

Type	Order coding
EM 11(12)..	DS 7490-11
EM 21(22)..	DS 7490-21
EMP 21..	DS 7490-21P
EM 31(32)..	DS 7490-31
EMP 31..	DS 7490-31P
EM(P) 41(42)..	DS 7490-41

Sealing rings for connection blocks with swivel fitting (see Chapter 2, "Available versions")

6.1.3 Line connectors

Coding Line connector	Order coding
G..	MSD 3-309
L..	SVS 3129020
WG..	MSD 4-209 P 10

Other line connectors

Economy circuits	MSD 4 ECO MSD 4 P 53 MSD 4 P 63	24 V DC 230 V DC 115 V DC	as per D 7833/1 as per D 7813 as per D 7813
LED circuit and protective circuit	SVS 3129020	24 V DC	as per D 7163
Clamp diode	MSD 3-209 C 1	150 V DC	as per D 7163
Proportional amplifier for type EMP	EV 22 K 5 EV 1 M 3 EV 1 D	(Card) (Module) (Module)	as per D 7817/2 as per D 7831/2 as per D 7831 D

References

Additional versions

- Directional seated valve type BVE: D 7921
- Directional seated valve type BVG 1 and BVP 1: D 7765
- Directional seated valve type G, WG and others: D 7300
- Directional seated valve type G with interchangeable solenoid: D 7300-12
- Directional seated valve type SVNE, SVSE: D 6354/1

